

Motorised mobile bed frame

This motorised frame is not just an aid, but a real game-changer in the care and assistance of individuals confined to bed for long periods. Designed for ergonomic use, FLEXI BED is the everyday ally for those seeking a balance between functionality, comfort and human proximity, while also providing additional safety thanks to its easily adjustable side rails.

FLEXI BED 2 and FLEXI BED 4: both models share a design that emphasises comfort and safety, with technical specifications that meet the need for compact dimensions and customised adjustments (head-foot and lateral movement).

With FLEXI BED, you bring innovation into your most personal space, improving the quality of care.



Optimise daily care with FLEXI BED: integrate it into your double bed and facilitate every assistive gesture.

VERSATILITY


Ideal both for patients who require frequent position changes and for those who require constant assistance.

ERGONOMICS AND COMFORT

The motorised movement of the bed sections allows a variety of positions, from lying to sitting, increasing patient comfort and simplifying caregiver activities.

SAFETY

Equipped with restraint systems and side rails adjustable at the touch of a button, it ensures maximum patient safety during use.

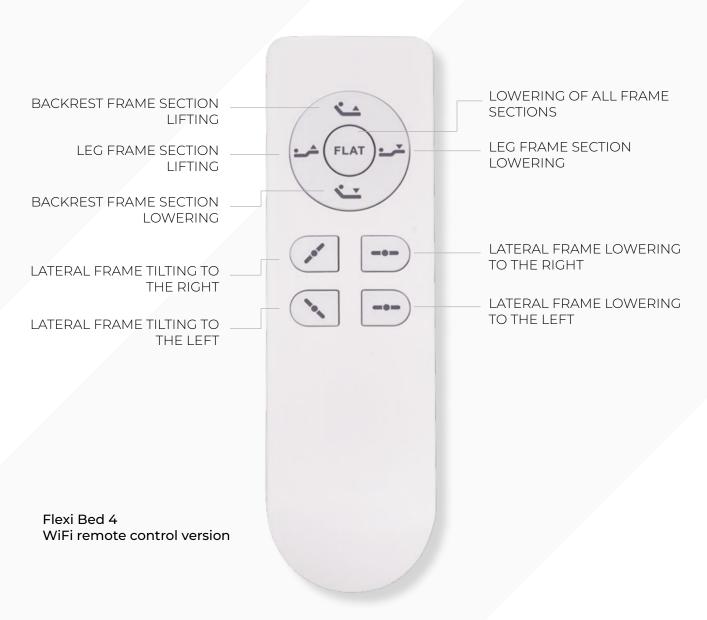

DISCOVER TRANSFORMATIVE COMFORT WITH FLEXI BED

Explore customised wellness with FLEXI BED, where every adjustment is a step towards comfort. Lift your head to eat or relax, elevate your feet for instant relief, and use lateral mobility to simplify daily care.




HEAD AND BACK LIFTING



LEG ADJUSTMENT



LATERAL MOVEMENT



FLEXI BED 2

Equipped with 2 motors, it allows efficient head and leg adjustment, effectively combining functionality and ease of use. Wired remote control.

FLEXI BED 4

Powered by 4 motors, it allows head and leg adjustment and independent movement of the backrest sides. WiFi remote control.

Maximum overall external dimensions "mm"	1950x885x115	1950x885x115
Overall bed frame dimensions "mm"	1950x885	1950x885
Backrest lifting angle	0°~75°	0°~75°
Leg lifting angle	0~42°	0~42°
Side lifting angle	-	0~45°
Maximum user load capacity	135 kg	135 kg
Safe working load	170 kg	170 kg
Side panel dimensions "mm"	625x355	625x355
Supply voltage "Vac"	100 - 240	100 - 240
Input power "Hz"	50 - 60	50 - 60
Total weight	31 kg	38 kg
Protection class	IPX4	IPX4

FX02 MATTRESS





Foam support surface, density 25 kg/m3.

Length (mm)	1930
Width (mm)	820
Height (mm)	50
Net weight (kg)	2
Maximum load (kg)	135
Fire-retardant	CA TB 117-2013